

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 December 2002 (19.12.2002)

PCT

(10) International Publication Number  
**WO 02/100583 A1**

(51) International Patent Classification<sup>7</sup>: **B23B 31/12, 31/103**

[CN/CN]; 2 Zhonghan Road, Manshan Wendeng, Shandong 264400 (CN). **TAN, Xingda** [CN/CN]; 2 Zhanghan Road, Manshan Wendeng, Shandong 264400 (CN).

(21) International Application Number: **PCT/CN02/00375**

(22) International Filing Date: **31 May 2002 (31.05.2002)**

(74) Agent: **CHINA PATENT AGENT (H.K.) LTD.**; 22/F, Great Engle Centre, 23 Harbour Road, Wanchai, Hong Kong (HK).

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
01115016.5 10 June 2001 (10.06.2001) **CN**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **SHANDONG WEIDA MACHINERY CO., LTD.** [CN/CN]; 2 Zhanghan Road, Manshan Wendeng, Shandong 264400 (CN).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **YANG, Guimo**

[Continued on next page]

(54) Title: **HAMMERLOCK CHUCK**

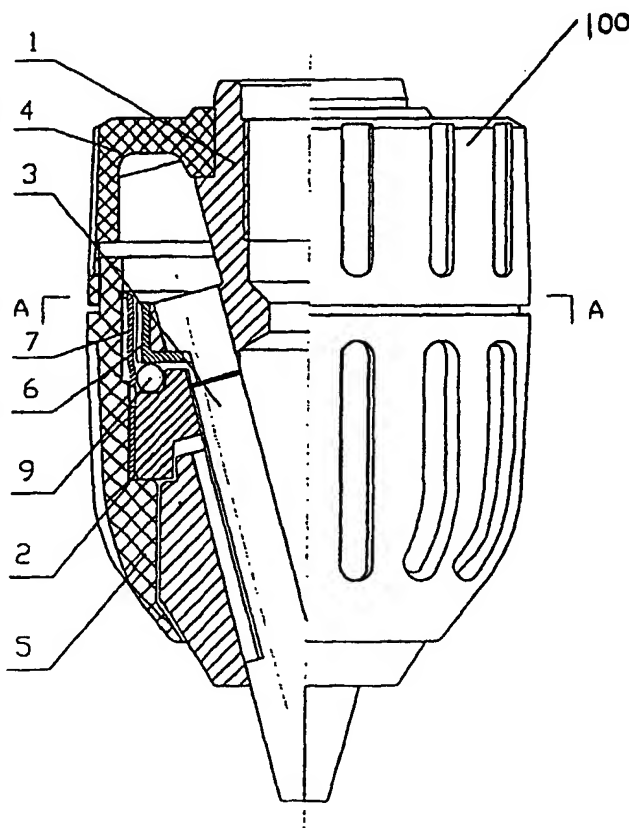

(57) Abstract: A chuck for use with a manual or powered driver that may also be used for hammer drilling. The chuck is constructed so that during normal operation for its intended purpose, the jaws holding a shaft for a tool do not loosen. The chuck includes at least one pawl to engage teeth on a gear ring such that rotation of a ring driver in a jaw gripping direction causes the gear ring to rotate. When the jaws tightly grip the shaft, the gear ring will frictionally engage a portion of the chuck so that the gear ring is rotationally locked to the chuck body. At the same time, the pawl engages the gear ring is rotationally locked to the chuck body. At the same time, the pawl engages the gear ring such that rotation of the ring driver and thus movement of the jaws in a non-jaw gripping direction is prevented during normal use of the hammerlock chuck.

WO 02/100583 A1



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## HAMMERLOCK CHUCK

### BACKGROUND

[001] The present invention generally relates to chucks for use with drills or with electric or pneumatic power drivers. More particularly, the present invention relates to a  
5 keyless chuck that may be tightened or loosened by hand or by actuation of the driver motor. The keyless chuck of the present invention has particular applicability with hammer-type drills or drivers.

[002] Both hand and electric or pneumatic tool drivers are well known. Although twist drills are the most common tools used with such drivers, the tools may also  
10 comprise screwdrivers, nut drivers, burrs, mounted grinding stones, and other cutting or abrading tools. Since the tools may have shanks of varying diameter or the cross-section of the tool shank may be polygonal, the device is usually provided with a chuck that is adjustable over a relatively wide range. The chuck may be attached to the driver by a threaded or tapered bore.

[003] A wide variety of chucks have been developed in the art. In the simplest  
15 form of chuck, three jaws spaced circumferentially approximately 120 degrees apart from each other are constrained by angularly disposed passageways in a body attached onto the drive shaft and configured so that rotation of the body in one direction with respect to a constrained nut engaging the jaws, forces the jaws into gripping  
20 relationship with the cylindrical shank of a tool, while rotation in the opposite direction releases the gripping relationship. Such a chuck may be keyless if it is rotated by hand.

[004] Despite the success of such keyless chucks, varying configurations of keyless chucks are desirable for a variety of applications. In particular, it is desirable to provide a chuck for use in a hammer drilling application. In a conventional chuck used  
25 for hammer drilling, the vibration that results from use of the tool can cause the jaws to loosen their grip around the shaft of the tool. This can have undesirable consequences, both for the work piece and for the operation of the tool.

[005] One solution to that problem is proposed in U.S. Pat. No. 5,816,582. In that patent, however, the chuck requires a front sleeve that has a number of ribs and  
30 indentations that may increase the cost and complexity of the chuck. Accordingly, it

would be desirable to provide a keyless chuck that requires fewer components and/or lower manufacturing cost.

#### **SUMMARY**

[006] The present invention provides a chuck for use with a manual or powered driver that can be used in a hammer drilling operation. The chuck includes a body having a nose section with an axial bore formed therein, a tail section, and jaw housings angularly disposed in the nose section and intersecting the axial bore. A plurality of jaws corresponding to the jaw housings are provided so that each jaw is slidably disposed in a corresponding jaw housing. The jaws have a gripping surface formed on one side (end) and threads formed on the opposite side (end).

[007] A gear ring is rotatably mounted about the body and is configured to frictionally lock to the body. The gear ring is in operative engagement with the threads on the jaws such that when the gear ring is rotated with respect to the body, the jaws will be moved.

[008] At least one pawl is rotatably associated with the gear ring and is configured such that when the gear ring is frictionally locked to the body, the pawl engages the gear ring until application of sufficient torque to overcome the engagement of the pawl with the gear ring. Accordingly, in operation, when the jaws tighten on the shaft of a tool or workpiece, the gear ring is locked to the body and the pawl engages the gear ring so that the jaws are prevented from moving in a non-jaw gripping direction during normal use of the hammerlock chuck.

[009] In another embodiment, the chuck includes a body, a thrust ledge, and jaws slidably positioned in passageways formed in the body. The chuck further includes a ring nut rotatably mounted relative to the body and in engagement with threads on the jaws. A ring driver is disposed in driving engagement with the ring nut so that when the ring driver is rotated with respect to the body, the jaws are moved to grip the shaft of a tool. A gear ring is rotatably located about the body. At least one pawl is provided to engage teeth on the gear ring such that rotation of the ring driver in a jaw gripping direction causes the gear ring to rotate.

[010] In operation, when the ring nut is tightened so that the jaws tightly grip a shaft of a tool or workpiece, the gear ring will frictionally engage the thrust ledge so that

the gear ring is rotationally locked to the body. In addition, the pawl engages the gear ring such that rotation of the ring driver and thus movement of the jaws in a non-jaw gripping direction is prevented during normal use of the hammerlock chuck.

[011] In another embodiment, a hammerlock chuck includes a body having a  
5 nose section, a middle section, a tail section, and a thrust ledge. An axial bore is formed in the body and it extends from the forward section to the rear section. A plurality of angularly arranged jaw housings are also provided in the body such that the jaw housings intersect the axial bore in the nose section.

[012] A plurality of jaws corresponding to the number of jaw housings is  
10 provided to engage a shaft of a tool or workpiece. Each jaw is slidably disposed in a corresponding housing. The jaws have a gripping surface on one side (end) and a threaded surface on the opposite side (end).

[013] A ring nut is disposed for rotation about the body and to engage the jaw  
15 threads. A sleeve is preferably rotatably associated with the nut such that rotation of the sleeve with respect to the body causes the jaws to move.

[014] At least one pawl is rotatably associated with the sleeve. In one  
embodiment, a ring driver is connected to the nut and the sleeve such that rotation of the sleeve with respect to the body causes the sleeve, the ring driver, and the ring nut to simultaneously rotate. Where a ring driver is provided, the pawl may be separate from  
20 the ring driver or may be integrally provided as part of the ring driver. In a preferred embodiment, the pawl is a spring pawl.

[015] A gear ring is rotatably located about the body such that rotation of the  
sleeve causes the gear ring to also rotate in the same direction. In one embodiment, the pawl engages the gear ring to rotationally drive the gear ring as the sleeve is  
25 rotated.

[016] When the gripping surface of the jaws contact the shaft of a tool or  
workpiece, the gear ring will frictionally engage the thrust ledge sufficient to rotationally lock the gear ring to the body. Upon further rotation of the sleeve, the pawl engages the  
gear ring with a restraining torque such that rotation of the sleeve in a non-jaw gripping  
30 direction is prevented during normal use of the hammerlock chuck. The pawl will engage the gear ring until such time as the sleeve is rotated in a non-jaw gripping

direction with a torque sufficient to exceed the restraining torque. Thereafter, as the sleeve is rotated in a non-jaw gripping direction, the gear ring and ring nut likewise rotate causing the jaws to move away from the shaft of the tool.

[017] Accordingly, it is an object of the present invention to provide an improved  
5 hammerlock chuck such that vibration during use does not cause the jaws to loosen their grip around the shaft of the tool. It is another object of the present invention to provide a keyless chuck that has a minimum number of individual components that must be assembled.

[018] These and other objects are achieved by providing a hammerlock chuck  
10 according to the present invention as described in greater detail below.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[019] FIG. 1 is a front plan view partly in section of one embodiment of the hammerlock chuck of the present invention.

[020] FIG. 1A is a top sectional view of the hammerlock chuck of FIG. 1 along  
15 line A-A.

[021] FIG. 1B is an exploded view of the hammerlock chuck of FIG. 1.

[022] FIG. 2 is a front plan view partly in section of another embodiment of the hammerlock chuck of the present invention.

[023] FIG. 2A is a top sectional view of the hammerlock chuck of FIG. 2 along  
20 line A-A.

[024] FIG. 2B is an exploded view of the hammerlock chuck of FIG. 2.

[025] FIG. 3 is a front plan view partly in section of another embodiment of the hammerlock chuck according to the present invention.

[026] FIG. 3A is a top sectional view of the hammerlock chuck of FIG. 3 along  
25 line A-A.

[027] FIG. 3B is an exploded view of the hammerlock chuck of FIG. 3.

[028] FIG. 4 is a cross sectional view of the ring driver illustrated in FIG. 2B.

[029] FIG. 5 is a top view of the ring driver illustrated in FIG. 2B.

[030] FIG. 6 is a cross sectional view of a ring driver similar to that illustrated in  
30 FIG. 1B, except the ring driver in FIG. 6 has only a single arm.

[031] FIG. 7 is a top view of the ring driver illustrated in FIG. 6.

[032] FIG. 8 a cross sectional view of the ring driver illustrated in FIG. 3B.

[033] FIG. 9 is a cross sectional view of a gear ring useful in the chuck of the present invention.

[034] FIG. 10 is a top view of a gear ring useful in the chuck of the present invention.

[035] FIG. 11 is a front plan view partly in section of one embodiment of the hammerlock chuck of the present invention.

[036] FIG. 12 is a top view of the chuck illustrated in FIG. 11.

[037] Use of the same reference numerals in the following specification and drawings is intended to represent the same or analogous features or elements of the invention.

#### **DETAILED DESCRIPTION**

[038] Turning now to FIG. 1, a hammerlock chuck in accordance with the present invention is illustrated. Hammerlock chuck 100 includes a front sleeve 5, an optional rear sleeve 4, a body 1, and a plurality of jaws 3. The body 1 is generally cylindrical in shape and includes a nose or forward section 11, a middle section 12, and a tail or rearward section 13. An axial bore 14 is formed in the nose section 11 of the body 1. The axial bore 14 is somewhat larger than the largest tool shank that the chuck is designed to accommodate.

[039] A threaded bore may be formed in the tail section to mate with the drive shaft of a powered or hand driver (not shown). While a threaded bore may be used, the threaded bore could be replaced with a tapered bore or other suitable shape to mate with a drive shaft. The threaded bore and the axial bore may communicate at the middle section 12 of the body 1. The tail section 13 of the body 1 can include a rear portion 15 with a shaped surface 16 to mate and receive the optional rear sleeve 4.

[040] As best seen in FIGs. 1A, 2A, or 3A, a plurality of jaw housings or passageways 31 are formed in the body 1 to correspondingly accommodate or house each jaw 3. While a number of jaws 3 may be provided according to manufacturing and other considerations, typically three jaws are provided. Referring to FIG. 1A, when three jaws are used, each jaw 3 is preferably separated from the adjacent jaw 3 by an arc of approximately 120 degrees.



[041] Typically, the longitudinal axes of the housings 31 and the jaws 3 are angled with respect to the longitudinal or axial axis of the chuck and intersect the chuck axis at a common point ahead of the chuck body. Each jaw 3 has a tool engaging face or gripping surface 32 that is generally parallel to the longitudinal axis of the chuck body and that is located on one side or end of the jaw 3. Each jaw 3 also has threads 33 on its opposite side or end. The threads 33 may be any suitable type and have any suitable pitch as is apparent to one of skill in the art.

[042] As illustrated in FIGS. 1-3, the body 1 includes a thrust ledge 1-1 that, in a preferred embodiment, is integral with the body 1 and constitutes the thrust-receiving portion of the body. It is, however, contemplated that the thrust ledge 1-1 may be a separate component from the body 1. The thrust ledge 1-1 is adapted for engagement with a gear ring 6 as will be described in more detail below. The thrust ledge 1-1 includes a plurality of jaw guideways (not shown) that are aligned with the passageways or housings 31 to permit movement (retraction and extension) of the jaws 3 through the guideways.

[043] The hammerlock also includes a gear ring 6 that has teeth 6-1 about its outer periphery, as best seen in FIG. 10. The teeth 6-1 are preferably one directional, the purpose of which will become clear. The gear ring also has a ledge 6-2, as shown in FIGs. 1B and 9, that contacts the thrust ledge 1-1 during certain operations. The gear ring 6 rotatably surrounds the body 1 and, in particular, the thrust ledge 1-1. In other words, the gear ring 6 can move relative to the body 1 and the ring nut 2.

[044] The present invention further includes a friction reducing surface or rolling element shown in the figures as a bearing 9. The friction reducing surface 9 may have any suitable configuration such as a plurality of ball bearings, a bearing assembly, a coating or the like. The friction reducing surface 9 sits between the ring nut 2 and the gear ring 6. The ring nut 2 is rotatably mounted with respect to the body 1 and is in engagement with the threads 33 on the jaws 3. Accordingly, the ring nut 2 includes threads 2-1 for mating with the threads 33 on the jaws 3 so that when the ring nut 2 is rotated with respect to body, the jaws 3 will be advanced or retracted in a particular direction along the longitudinal axis of the passageways. This direction has a component along the longitudinal axis of the body.

[045] As shown in FIG. 3, in one embodiment, the ring nut 2 may include drive slots 2-2 that mate with drive ribs 5-4 provided on the inner surface of the front sleeve 5. In this way, the ring nut 2 is keyed to the front sleeve 5 so that when the front sleeve 5 is rotated, the ring nut 2 will rotate with the sleeve 5 and move the jaws 3 as described above. In one embodiment, the ring nut 2 is configured in the form of a one-piece nut, but could be formed in two or more pieces that could be joined together or could merely be concentrically disposed.

[046] As shown in FIG. 1, a ring driver 7 is configured and disposed to cooperate with the ring nut 2 and the front sleeve 5. The ring driver 7 is connected to the ring nut 2 such that when the ring driver 7 rotates, the ring nut 2 rotates, causing the jaws 3 to move. Preferably, the ring driver 7 is securely connected to the ring nut 2 such as by welding or other means.

[047] The ring driver 7 also cooperates with the front sleeve 5. In one embodiment, best seen in FIG. 1 the ring driver 7 has at least one arm 7-1 connected to a foot 7-2. In a preferred embodiment, the ring driver 7 has a pair of arms and feet, opposite each other. In an alternative embodiment, best seen in FIGs. 6A, 6B, and 7, the ring driver 7 is provided with only a single arm 7-1.

[048] The arm 7-1, whether one or more are provided, engages a drive slot 5-1 provided on the inner surface of the front sleeve 5. Likewise, the foot 7-2 engages an annular groove 5-2 also provided on the inner surface of the front sleeve 5 so that there is no axial movement between the ring gear 7 and the front sleeve 5. Preferably, more than one drive slot 5-1 is provided along the inner periphery. More preferably, the drive slots 5-1 are spaced from each other a distance about the same as the distance between each arm 7-1. Engagement of the drive slot 5-1 and the arms 7-1 causes the gear ring 6 to rotate as the front sleeve 5 rotates.

[049] In another embodiment best seen in FIGs. 3-B and 8, the ring driver arms and feet are eliminated and the ring driver cooperates with the front sleeve 5 by securing the ring driver 7 to the ring nut 2, which in turn, is keyed to the front sleeve 5 by the drive slots 2-2 engaging the drive ribs 5-4. In this embodiment, a locking spring 10 or similar mechanism engages annular groove 5-2 to axially secure the ring driver 7 with the front sleeve 5.

[050] In further accordance with the present invention, at least one pawl 7-3 is provided and is rotatably associated with the gear ring 6 and the sleeve 5. Preferably, the pawl 7-3 has a boss 7-4 at one end. The boss 7-4 is configured to engage the teeth 6-1 of the gear ring 6. As shown in FIGs. 1 and 11, two pawls are provided and each engages a slot 5-3 provided on the inner surface of the front sleeve to be driven when the sleeve is rotated. Accordingly, when the front sleeve 5 is rotated, the pawl(s) 7-3 are likewise rotated. As better seen in FIGs. 11 and 12, the pawls 7-3 are biased inwardly so that each boss 7-4 of each pawl 7-3 will be biased in contact with the teeth 6-1 of the gear ring 6.

[051] In an alternative embodiment, the pawl 7-3 is formed integral with the ring driver 7, as shown in FIGs. 2B and 3B. Preferably, the pawl 7-3 is resilient. In the embodiment shown in FIG. 2B, as best seen in FIGs. 4 and 5, two pawls 7-3 are provided integral with the ring driver 7. The pawls 7-3 are preferably made from a resilient material and are biased inward of the circumference of the ring driver 7, as best seen in FIG. 5. Accordingly, each boss 7-4 of each pawl 7-3 will be biased in contact with the teeth 6-1 of the gear ring 6.

[052] Similarly, in the embodiment shown in FIG. 3B, as best seen in FIG. 8, two pawls 7-3 are provided integral with the ring driver 7. The pawls 7-3 are preferably made from a resilient material and are biased inward of the circumference of the ring driver 7, as best seen in FIG. 8. Accordingly, each boss 7-4 of each pawl 7-3 will be biased in contact with the teeth 6-1 of the gear ring 6.

[053] When assembled, the boss 7-4 of the pawl 7-3 normally engages the teeth 6-1 of the gear ring 6 so that when the front sleeve 5 is rotated with respect to the body 1, the ring driver 7, ring nut 2, and pawl 7-3 are rotated in the same direction and because the boss 7-4 is engaged with the teeth 6-1 of the gear ring 6, the gear ring 6 also rotates in the same direction.

[054] As noted above, the front sleeve 5 is adapted to be fitted over the nose section 11 of the chuck. As shown in FIG. 3B, at least one drive rib 5-4 of the front sleeve 5 engages a corresponding ring nut drive slot 2-2 so that front sleeve 5 and ring nut 2 will be operatively connected or keyed together. In other words, when the front sleeve 5 is rotated, the ring nut 2 will rotate with the sleeve 5. While the mating

connection between the front sleeve 5 and the ring nut 2 is illustrated, it will be appreciated by one of skill in the art that any suitable method of operative connection between the front sleeve 5 and the ring nut 2 could be used within the scope of the present invention (e.g., through a ring driver 7 as discussed above).

5           [055] If desired, the rear sleeve 4 may be omitted and the front sleeve 5 may be extended to the tail end of the body 1. This alternative may be desirable when a spindle lock or the like is provided on the driver or when the driver is used to tighten or loosen the jaws 3.

10           [056] The exterior circumferential surface of the front sleeve 5 may be knurled or may be provided with longitudinal ribs or other protrusions to enable the operator to grip it securely. In like manner, the outer circumferential surface of the rear sleeve 4, if present, may be knurled or ribbed if desired. The front and rear sleeves may be fabricated from a structural plastic such as polycarbonate, a filled polypropylene, for example, glass filled polypropylene, or a blend of structural plastic materials. Other  
15 composite materials such as, for example, graphite filled polymerics also would be suitable in certain environments. As will be appreciated by one skilled in the art, the materials from which the chuck of the present invention is fabricated will depend on the end use of the chuck, and the above are provided only by way of example.

20           [057] It will be appreciated that the rear sleeve 4 may be fixed to the body 1, while the front sleeve 5 is operatively associated with gear ring 6, ring driver 7, and/or ring nut 2 and is rotatable with respect to the body 1. Because of the interaction between the threads 33 on the jaws 3 and the threads 2-1 on the ring nut 2, relative movement of the front 5 and the rear 4 sleeves, causes the jaws 3 to be advanced or retracted, depending upon the direction of relative movement.

25           [058] In operation, as the front sleeve 5 is rotated with respect to the body 1, the jaws 3 increase the forward gripping force applied to the shaft of a tool. In addition, the gear ring 6 and friction reducing surface 9 rotate relative to the body 1 along with the ring driver 7. At the same time, a corresponding axial force is increasingly exerted rearwardly through the jaws 3 to the ring nut 2, friction reducing surface 9, and gear ring  
30 6. This rearward axial force is transmitted through the gear ring 6 to the body 1, and particularly to the thrust ledge 1-1. After the jaws 3 have gripped the tool shaft, the

rearward axial force produces a frictional force between the gear ring 6 and the thrust ledge 1-1 so that the gear ring 6 is frictionally locked to the body 1 and cannot rotate.

[059] This resulting frictional force between the thrust ledge 1-1 of the body 1 and the gear ring 6 is directed circumferentially in a direction opposite to the direction that the front sleeve 5, ring driver 7, ring nut 2, and pawl 7-3 are being rotated. When  
5 the force of the sliding friction between the gear ring 6 and the thrust ledge 1-1 is greater than the compound force of the pawl on peripheral movement of the gear ring 6, the gear ring 6 and the thrust ledge 1-1 become immobile relative to each other. Continuing to apply force to the sleeve 5, the friction reducing surface 9 begins to move  
10 relative to the gear ring 6. The ring nut 2 also begins to turn relative to the gear ring 6 and the chucking effect is converted to the axial force of the ring nut 2 and is transferred to the thrust ledge 1-1 by the friction reducing surface 9 and the gear ring 6 until it is tightened and becomes immobile. Accordingly, this resulting frictional force acts to restrain circumferential movement of gear ring 6 with respect to thrust ledge 1-1 of the  
15 body 1. Thus, when the jaws 3 are tightened around the shaft of a tool in the desired manner, the resulting frictional force prevents further rotation of the gear ring 6 with respect to the body 1. In this manner, the gear ring 6 becomes locked to the body 1 and therefore becomes selectively non-rotatably disposed with respect to the body 1.

[060] In other words, when the friction of the gear ring 6 against the thrust ledge  
20 1-1 becomes greater than the driving force between the pawl 7-3 and teeth 6-1 of the gear ring 6, the gear ring 6 will become stationary or frictionally locked to the body 1 (i.e., locked rotatably with respect to the body). The pawl 7-3, however, will continue to rotate with the sleeve 5 as rotation of the sleeve 5 continues. In the preferred embodiment, where the pawl 7-3 is a spring, the continued rotation of the sleeve 5,  
25 causes the pawl 7-3 to bend and the boss 7-4 to disengage from successive teeth (i.e., the boss will "pop up" over the teeth and create a clicking sound).

[061] Because the ring nut 2 is operatively associated with the front sleeve 5, it still rotates with the sleeve 5 causing the jaws 3 to increasingly bite into the shaft of the workpiece until the jaws 3 cannot travel further. At this point, the boss 7-4 of the pawl 7-  
30 3 engages a tooth 6-1 on the gear ring 6 to provide a restraining torque to lock the jaws 3 in place during operation of the drill, particularly when operating in a hammer mode.

[062] In a conventional chuck used to secure a drill engaged in hammer drilling for example, the vibration that results from use of the tool tends to cause the ring nut and front sleeve to move in the direction of least resistance and, therefore, to cause the jaws to loosen (i.e., release) their grip around the shaft of the tool. In accordance with the chuck of the present invention, however, the cooperation of the boss 7-4 of the pawl 7-3 and the gear ring 6 can be controlled to produce a restraining torque that counteracts such release torque. Thus, before the front sleeve 5 can rotate with respect to the gear ring 6 (and with respect to the body secured to the gear ring 6 by the previously mentioned rearwardly acting axial force), the magnitude of the release torque allowed by the vibrations acting on the chuck must exceed the restraining torque that prevents the gear ring 6 from rotating relative to the front sleeve 5.

[063] The desired magnitude of this restraining torque is such as to prevent vibrations from causing the front sleeve (and thus the ring driver or ring nut) to rotate relative to the body 1. This ensures that the jaws 3 do not loosen their desired grip around the tool shaft during vibration of the tool when in use for its intended purpose such as hammer drilling or any other application that involves vibrations. Upon application of a torque to the front sleeve 5 that exceeds the restraining torque, then the boss 7-4 of the pawl 7-3, which is preferably a spring pawl, will disengage from the tooth 6-1 in which it is engaged, so that the front sleeve 5, the ring driver 7, the gear ring 6, and the ring nut 2 will be selectively rendered rotatable with respect to the body 1.

[064] To release or unlock the gear ring 6, the front sleeve 5 is rotated in a non-jaw tightening or opposite direction with sufficient torque to overcome the restraining torque. Because the rolling friction is less than the force of the sliding friction under the same stress, with the movement of the sleeve 5, the pawl 7-3 first moves and makes way relative to the teeth 6-1 of the gear ring 6 and first makes the ring nut 2 turn relative to the gear ring 6. Subsequently, as the axial pressure of the ring nut 2, the gear ring 6 and the body 1 decreases, the sliding friction between the gear ring 6 and the thrust ledge 1-1 also decreases. Rotation in this manner will cause the boss 7-4 of the pawl 7-3 to disengage from the tooth 6-1 thereby loosening frictional engagement of the gear ring 6 with the body 1 so that the gear ring 6 will again be carried by the pawl 7-3 toward the non-jaw tightening direction.

[065] While the above description is set forth with respect to a keyless chuck, it should be appreciated that the principles of the present invention are equally applicable to a keyed chuck, and such is within the scope of the present invention. These and other modifications and variations to the present invention may be practiced by those of  
5 ordinary skill in the art, without departing from the spirit and scope of the present invention, which is more particularly set forth in the appended claims. In addition, it should be understood that aspects of the various embodiments might be interchanged both in whole and in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to be  
10 limitative of the invention so further described in such appended claims.

## WHAT IS CLAIMED:

1. A hammerlock chuck for use with a manual or powered drill comprising:
  - a. a body having
    - i. a nose section having an axial bore formed therein
    - 5 ii. a tail section, and
    - iii. and jaw housings angularly disposed in the nose section and intersecting the axial bore;
  - b. a plurality of jaws corresponding to the jaw housings, each jaw being slidably disposed in a corresponding jaw housing and having a gripping surface formed  
10 on one side and threads formed on the opposite side;
  - c. a gear ring rotatably mounted about the body and being configured to frictionally lock to the body, the gear ring in operative engagement with the threads on the jaws such that when the gear ring is rotated with respect to the body, the jaws will be moved; and
  - 15 d. at least one pawl rotatably associated with the gear ring and being configured such that when the gear ring is frictionally locked to the body, the pawl engages the gear ring until application of sufficient torque to overcome the engagement of the pawl with the gear ring.
- 20 2. The hammerlock chuck of claim 1 further comprising a ring nut that is disposed for rotation about the body and engages the jaw threads.
3. The hammerlock chuck of claim 2 wherein the ring nut is a one-piece nut.
- 25 4. The hammerlock chuck of claim 2 further comprising a friction-reducing surface between the gear ring and the ring nut.
5. The hammerlock chuck of claim 2 further comprising a ring driver disposed about the ring nut wherein rotation of the ring driver results in rotation of the ring nut.
- 30 6. The hammerlock chuck of claim 5 wherein the ring driver is fixed to the ring nut.



7. The hammerlock chuck of claim 1 further comprising a sleeve rotatably surrounding the nose section, wherein rotation of the sleeve with respect to the body causes the jaws to move.

5

8. The hammerlock chuck of claim 2 further comprising a sleeve disposed in driving engagement with the ring nut.

9. The hammerlock chuck of claim 8 wherein the ring nut includes at least one slot  
10 for receipt of a corresponding drive rib provided on the sleeve.

10. The hammerlock chuck of claim 5 further comprising a sleeve connected to the ring driver.

15 11. The hammerlock chuck of claim 1 wherein the at least one pawl is a spring.

12. The hammerlock chuck of claim 5 wherein the pawl is integral with the ring driver.

13. The hammerlock chuck of claim 1 wherein the tail section has an axial bore  
20 formed therein to mate with a drive shaft.

14. The hammerlock chuck of claim 1 further including a rear sleeve secured to the tail section.

25 15. The hammerlock chuck of claim 1 wherein the gear ring has an outer periphery with teeth.

16. The hammerlock chuck of claim 15 wherein the teeth are one directional.

17. A hammerlock chuck for use with a manual or powered drill comprising:
- a. a body having a nose section, a middle section, a tail section, and a thrust ledge, the body having an axial bore that extends from the forward section to the rear section and the body having a plurality of angularly arranged jaw housings;
  - 5 b. a plurality of jaws corresponding to the number of jaw housings, each jaw slidably disposed in a corresponding housing, the jaws having a gripping surface on one side and a threaded surface on the opposite side;
  - c. a ring nut disposed for rotation about the body and engaging the jaw threads;
  - 10 d. a sleeve rotatably associated with the ring nut;
  - e. at least one pawl rotatably associated with the sleeve; and,
  - f. a gear ring rotatably located about the body wherein rotation of the sleeve in a jaw gripping direction causes the gear ring to frictionally engage the thrust ledge and to rotationally lock the gear ring to the body, and upon the gear ring being
  - 15 rotationally locked to the body, the at least one pawl engages the ring gear such that rotation of the sleeve in a non-jaw gripping direction is prevented during normal use of the hammerlock chuck.
18. The hammerlock chuck of claim 17 further comprising a ring driver disposed
- 20 about the ring nut.
19. The hammerlock chuck of claim 18 wherein the ring driver is connected to the ring nut.
- 25 20. The hammerlock chuck of claim 19 wherein the ring driver is securely connected to the ring nut.
21. The hammerlock chuck of claim 20 wherein the ring nut is a one-piece nut.
- 30 22. The hammerlock chuck of claim 21 wherein the ring nut includes at least one slot for receipt of a corresponding rib on the sleeve.

Fig 1

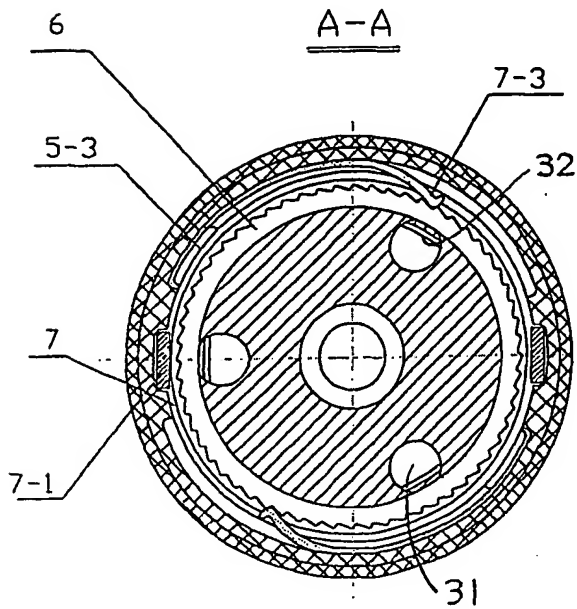
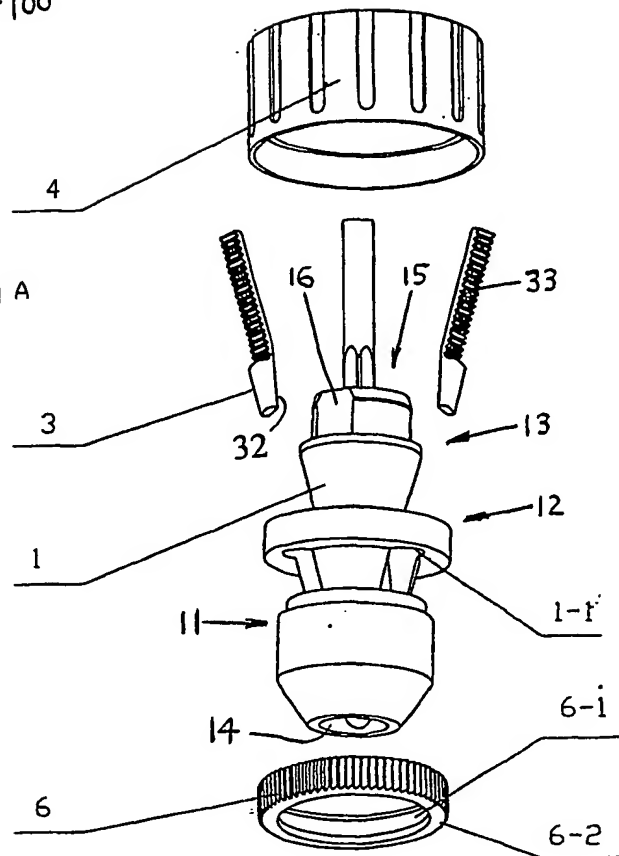
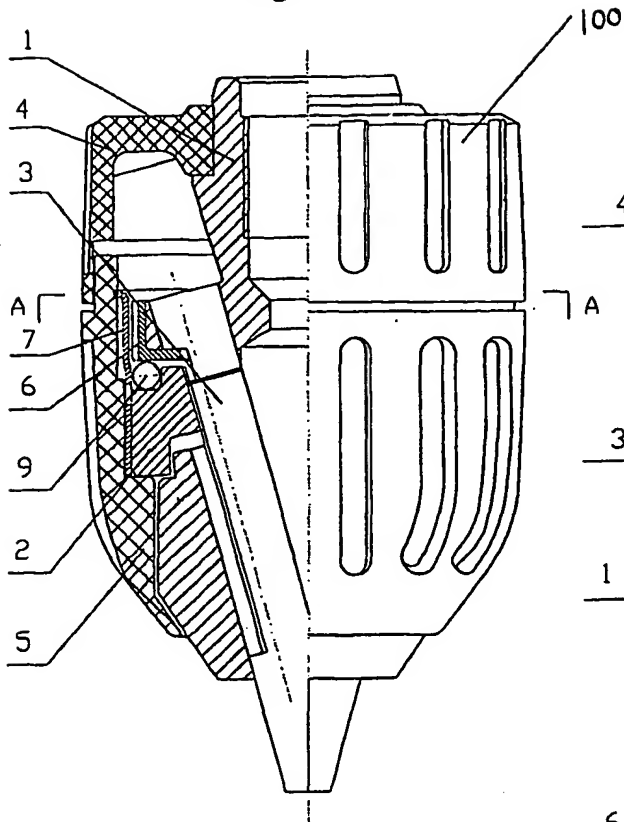


Fig 1A


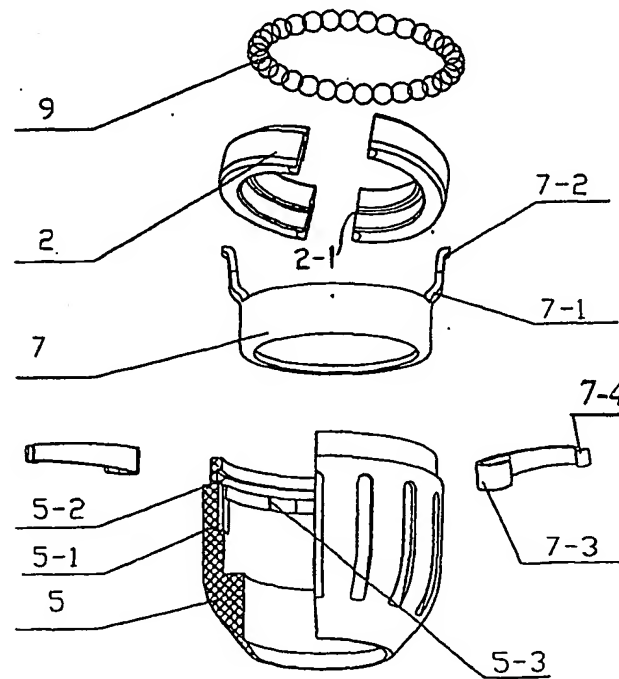


Fig 1B

Fig2

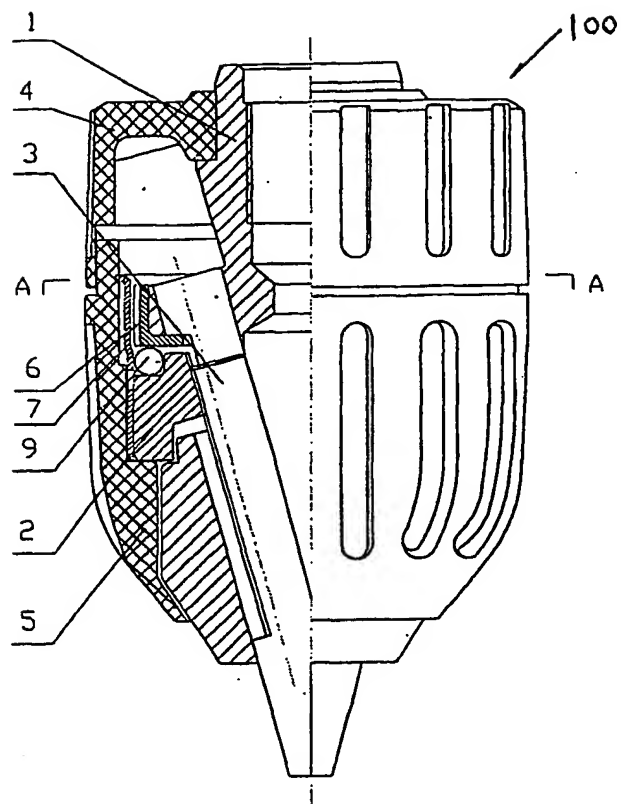

A-A

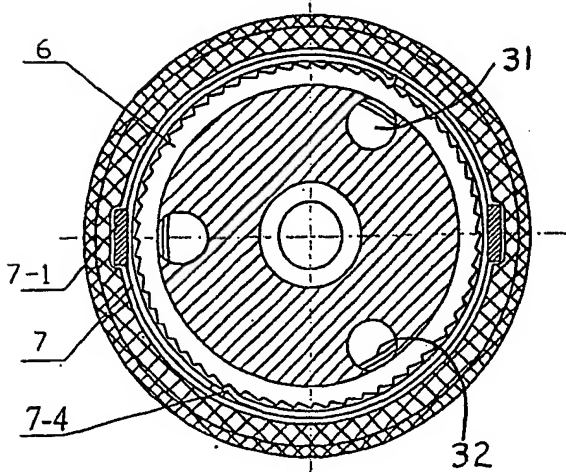


Fig2A

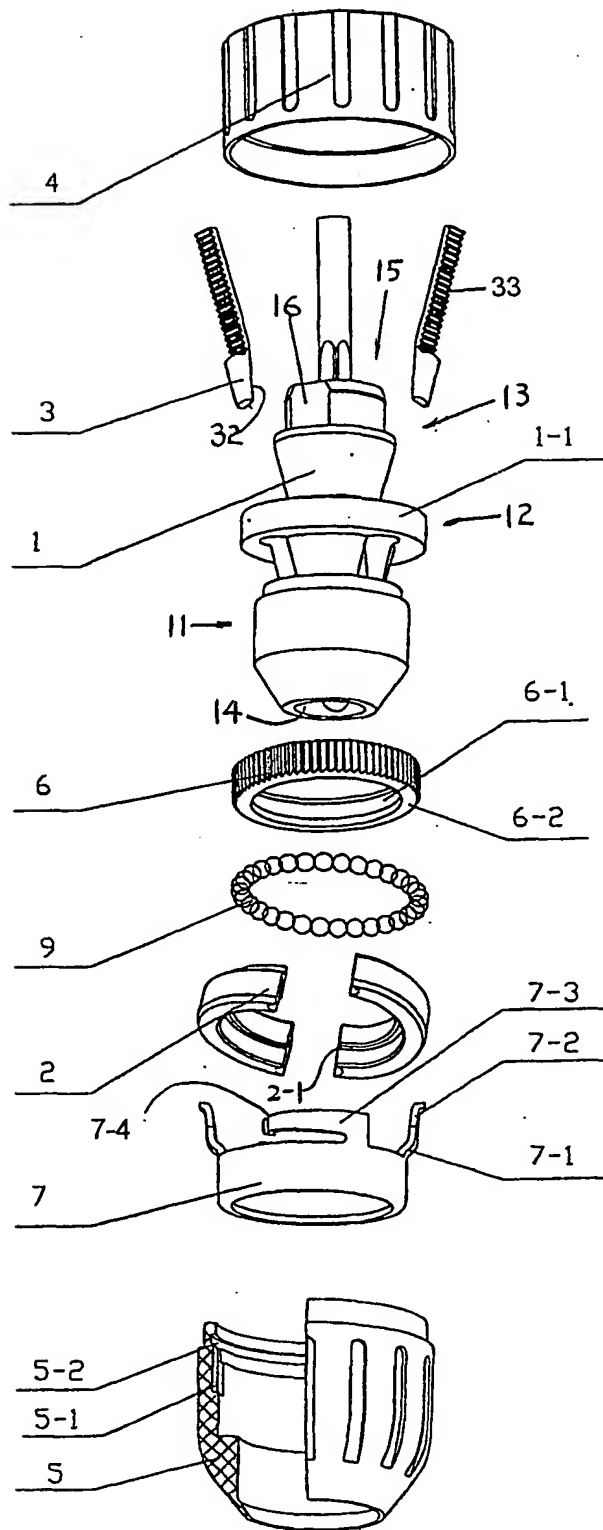


Fig 2B

Fig 3

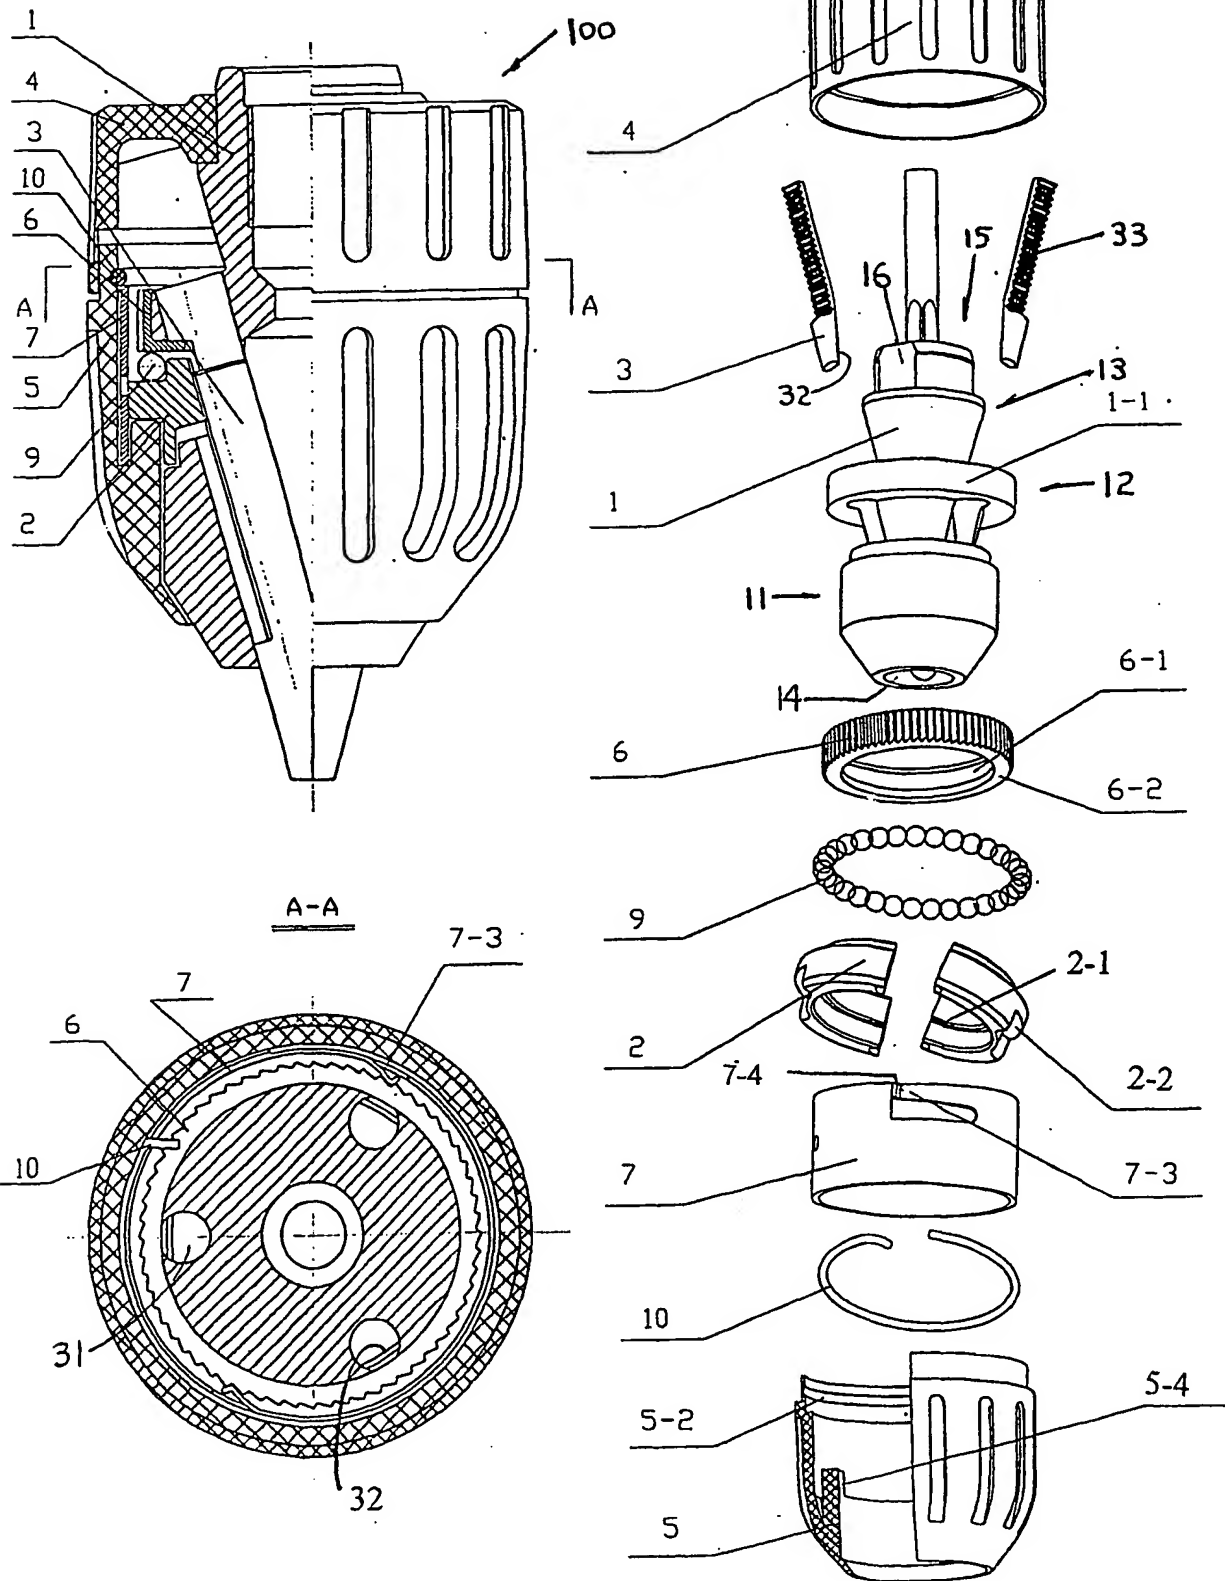


Fig3A

Fig 3B

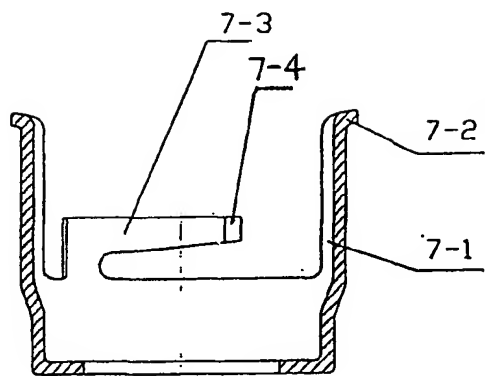


Fig 4

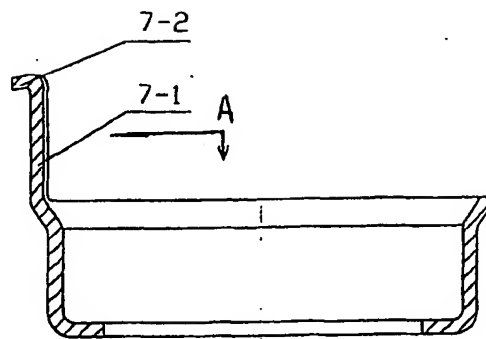


Fig 6A




Fig 6B

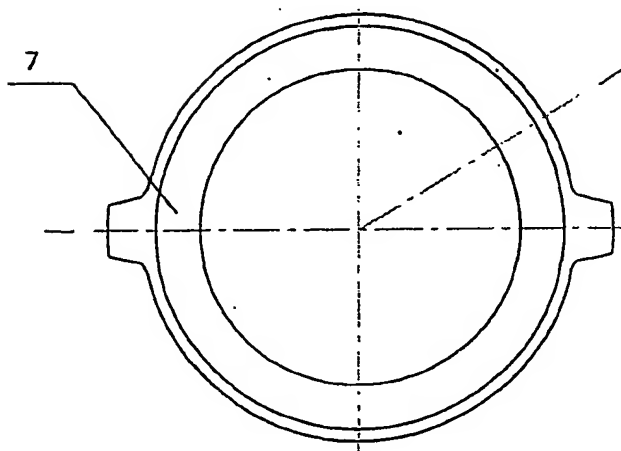


Fig 7

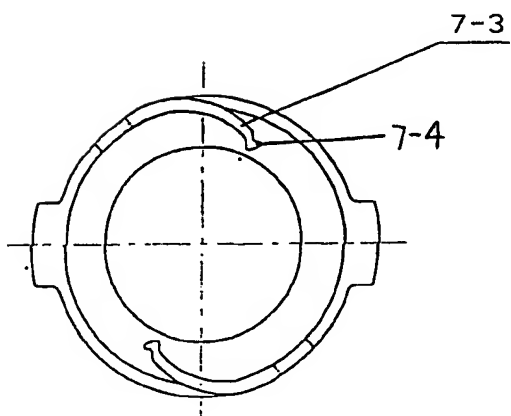


Fig 5

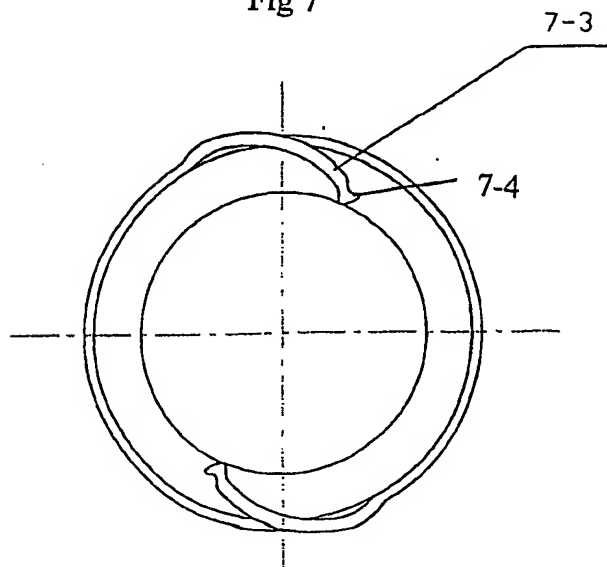


Fig 8

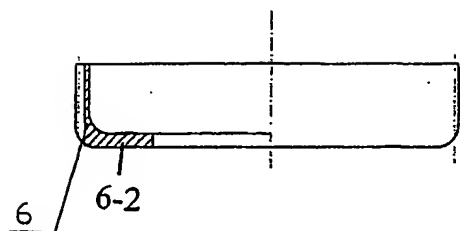


Fig 9

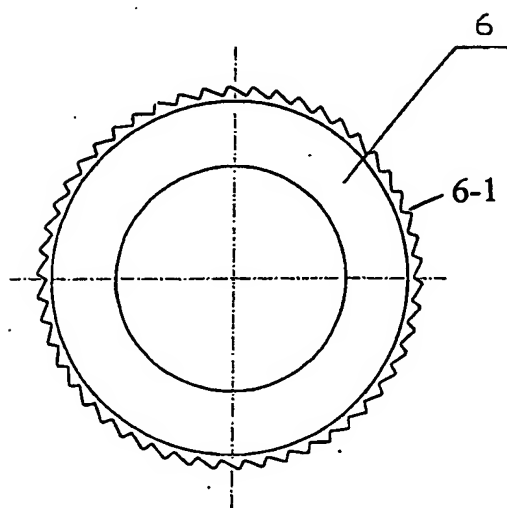


Fig 10

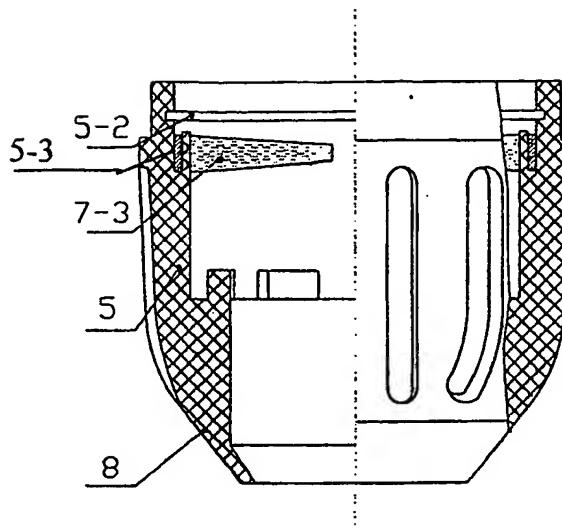


Fig 11

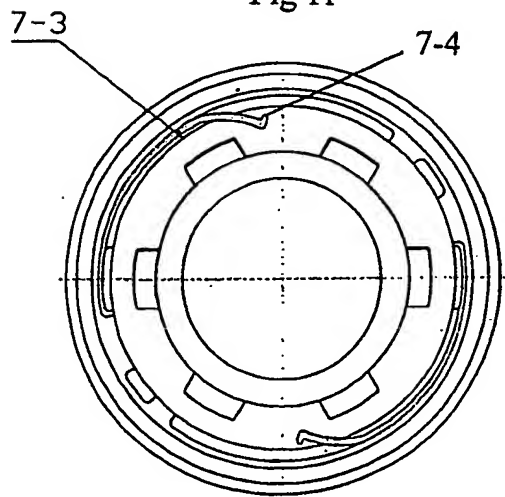


Fig 12

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/CN02/00375

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B23B 31/12 31/103

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B23B 31/12 31/103 31/117 51/12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Chinese Invention 1985-2001, Chinese Utility Models 1985-2001

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI EPODOC CNPAT PAJ: chuck power tool Holders Incorporated 卡盘 动力工具霍德尔斯公司

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN, A, 1242727 (Kevin.C.Miles Benjamin.A.Gaddis etc.) 26.Jan.1997(26.01.97) see the whole document	1-5,7,13-19
Y	CN,A,1231628(Christopher.B.BartonStephen.W.Steadingsetc.) 13.Otc.1999(13.10.99) see the whole document	1-5,7,13-19

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search  
20.July 2002(20.07.02)

Date of mailing of the international search report  
29 AUG 2002

Name and mailing address of the ISA/CN  
6 Xitucheng Rd., Jimen Bridge, Haidian District,  
100088 Beijing, China  
Facsimile No. 86-10-62019451

Authorized officer

  
Zhang Lijuan

Telephone No. 86-10-62093796

Form PCT/ISA/210 (second sheet) (July 1998)



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.

PCT/CN02/00375

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN1242727A	26-01-00	None	None
CN1231628A	13-10-99	WO9814294	09-04-98
		US5741016	21-04-98
		AU4327197	24-04-98
		EP0932466	04-08-98
		BR9712173	31-08-99
		JP2001501138T	30-01-01

Form PCT/ISA /210 (patent family annex) (July 1998)